

## FH-001 Wall Outlet


Wall outlet FH-001 is designed for use in residential and business applications for the termination of up to 2 fibers. It can hold max 2 SC adaptors. The unit can be quickly installed within an office or house.

### Features

- ✓ Economic design
- ✓ Ability to allow cables to enter from both sides of the unit
- ✓ Removable cover for easy access
- ✓ Compact, low profile, wall mounted unit used for small and large business premises

### Technical Data

Number of input cable ports: 4  
 Maximum input cable diameter(mm):5mm  
 Maximum Capacity: 2 fibres  
 Dimension: 86 mm x 86 mm x19mm

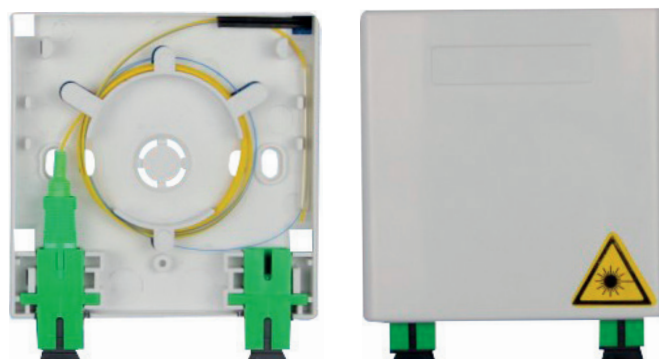

### Specifications & Ordering Information


Order No	Dimensions LxWxH(mm)	Cable Ports	Spliced Fiber Storage Capacity	Adaptor Capacity
ALF-FH-001	86x86x19	4 Cable ports (for cables with max diameter 5 mm)	2 Splices	2 SC Simplex Adaptors

## FH-108 Wall Outlet

Wall outlet FH-108 is a compact fiber terminal for use at the final fiber termination point in the customer premises. The FH-108 provides mechanical protection and managed fiber control in an attractive format suitable for use inside customer premises. A variety of possible fiber termination techniques are accommodated.

### Features

- ✓ Splicing to factory terminated pigtails
- ✓ Positive fiber management
- ✓ Direct termination with field installable connectors
- ✓ Attractive design for indoor use
- ✓ Can hold up to 4 mechanical splices and fusion splice protectors and mechanical SC connectors can be integrated as well
- ✓ Splice cable to cable
- ✓ Compatible with 2 SC Simplex adaptors
- ✓ Multiple cable entry points (cable diameter ≤ 6mm)
- ✓ Can be wall mounted and mounted on wall boxes with fixation points of 60mm

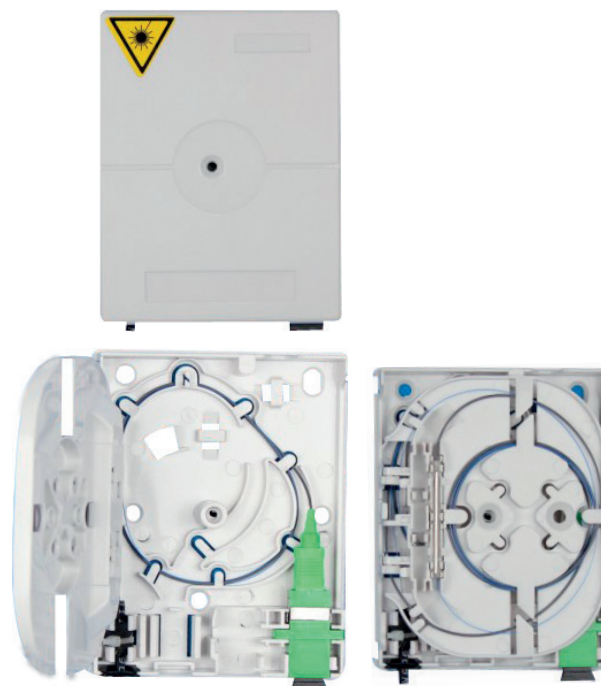

### Specifications & Ordering Information

Order No	Dimensions LxWxH(mm)	Cable Ports	Spliced Fiber Storage Capacity	Adaptor Capacity
ALF-FH-108	105.6x82.5x23.3	2 Cable ports (for cables with max diameter 6 mm)	4 Splices	2 SC Simplex or 2 LC Duplex Adaptors