

FH-208 Wall Outlet

Wall outlet FH-208 is a very compact wall outlet for maximum 2 FO connectors and 1 RJ-45 or RJ-11 Cu connector. The box provides mechanical protection for the fiber and permits appropriate access while maintaining the highest standards of fiber management. The box is typically used at the customer premises in the termination part of the access network.

Features

- ✓ Can be used flush mount or surface mount
- ✓ Compatible with almost any standard electricity box
- ✓ Compatible with 250 micron and 900 micron fiber types
- ✓ Innovative, removable fiber organizer system facilitates an easy installation in the field
- ✓ Fiber can be terminated using field installable connectors, fusion splices
- ✓ Guaranteed minimum bending radius of 20mm
- ✓ One SC or duplex LC connector footprint
- ✓ Splice-through function allows moving the FO access point to any other point in the premise
- ✓ Provide a clean upgrade path for your indoor wiring by starting off with Cu and use the wall plug in combination with indoor Fi/Cu cabling
- ✓ Environmental friendly materials, low smoke zero halogen
- ✓ Cable entry points : back, bottom, side

Specifications & Ordering Information

ALF-FH-208-**X****XX**-**X** RJ**X**-**X**

Numbers of pigtails
0
1
2(LC only)

FO adaptor type
S1, SC/APC
S2, SC/PC
L1, LC/APC
L2, LC/PC

Extension kit
E, Extension kit
N, No Extension kit

Type of RJ connector
1, RJ11 and holder
4, RJ14 and holder
0, no RJ connector holder


Numbers of RJ connector
0
1



FH-308 Wall outlet

Features

- ✓ Ergonomically design, compact design,
- ✓ Ability to allow cables to enter from rear or bottom of the unit
- ✓ Removable cover for easy access
- ✓ Indoor use for Wall mounted unit used for small and large business premises
- ✓ Easily re-enter with a minimum of tools, saves time and cost
- ✓ Up to 4 cores(heat shrink protective sleeve) or 2 cores(3M mechanical splices)
- ✓ Can hold 2 SC simplex adaptor or 2 LC duplex adaptor
- ✓ Can be used for Blown Tube cable or common cables
- ✓ Three (3) cable ports, each port for one cable with maximum diameter Ø 10 mm
- ✓ ROHS compliance

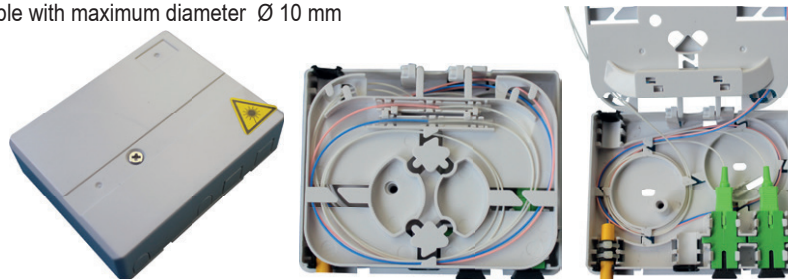

Specifications & Ordering Information

Order No	Dimensions LxWxH(mm)	Cable Ports	Spliced Fiber Storage Capacity	Adaptor Capacity
ALF-FH-308	108.5x85x27	3 Cable ports (for cables with max diameter 10 mm)	4 cores(heat shrink protective sleeve) or 2 cores(3M mechanical splices)	2 SC Simplex or 2 LC Duplex Adaptors