


TB-X21D Termination Box Features

- ✓ Accommodate 1x8-1x16PLC Splitter
- ✓ Anti-UV (Ultra Violet)
- ✓ Waterproof
- ✓ Up to 16 FTTH Drops
- ✓ 2 inlet ports, 16 outlet ports
- ✓ Accommodate SC /LC Adaptor
- ✓ It is applicable for wall-mounted, indoor or outdoor
- ✓ Max capacity(F): 16

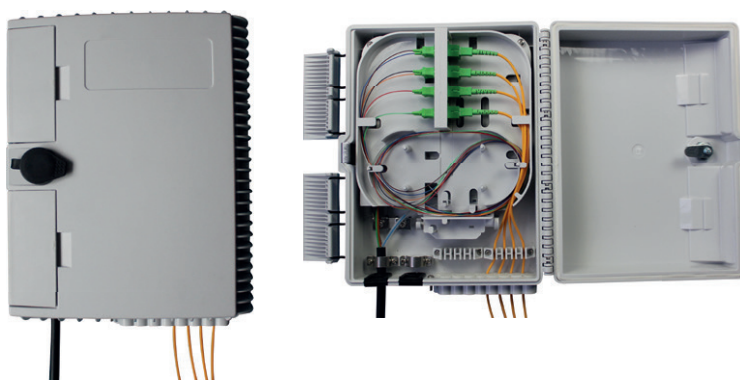

Applications

- ✓ FTTH access network
- ✓ Telecommunication Network
- ✓ CATV Networks
- ✓ Data communications Network
- ✓ Local Area Networks
- ✓ Wall-mounted, Indoor or Outdoor



TB-X21D

Specifications & Ordering Information

Order No	Dimensions LxWxH(mm)	Cable Ports	Spliced Fiber Storage Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-X21D	315x236x108.5	2 cable ports(for cables with max 16 mm) 16 drop cable ports	16 Splices	1x8, 1x16 PLC Splitter	16 SC Simplex Adaptors


TB-X30 Termination Box

Features

- ✓ Resistance to chemical and U.V attack
- ✓ Wall mounting or pole mounting.
- ✓ ROHS Compliance

Applications

- ✓ Widely used in FTTH access network
- ✓ Telecommunication Networks
- ✓ CATV Networks
- ✓ Data communications Networks
- ✓ Local Area Networks

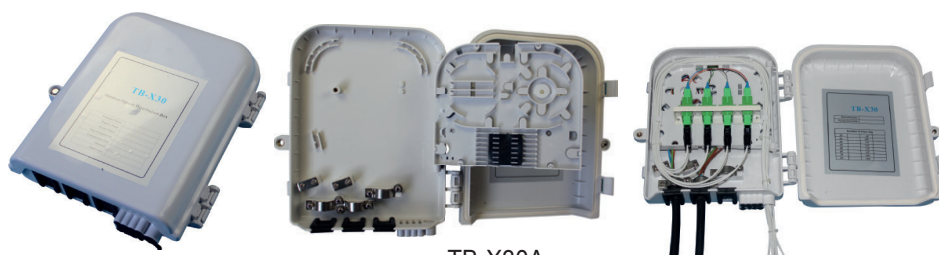

TB-X30A



TB-X30B

Specifications & Ordering Information

Order No	Dimensions LxWxH(mm)	Cable Ports	Spliced Fiber Storage Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-X30A	233x204x60	3 cable ports(for cables with max 12 mm) 8 drop cables ports	8 Splices	1x4, 1x8 PLC Splitter	8 SC Simplex Adaptors
ALF-TB-X30B	247x204x70	2 cable ports(for cables with max 12 mm) 12 drop cables ports	12 Splices	1x4,1x8, 1x16 PLC Splitter	12 SC Simplex Adaptors