


## TB-X48A Termination Box

### Features

- ✓ Up to 48 drop cables
- ✓ Up to 54 Simplex SC adaptors
- ✓ Can accommodate up to 6 pieces 1 x 8, 1 x 16 or 1 x 32 PLC Splitter
- ✓ Maximum capacity is 144F(6 trays)
- ✓ The maximum capacity of splice trays is 24 fibers
- ✓ The oval port is for 1 loop cable or 2 cables with max Ø 20 mm
- ✓ The reserved port is for cables with max Ø 18 mm
- ✓ The twelve ports with diameter Ø 14 mm, each port can hold 4 drop cables
- ✓ Bending radius > 30mm
- ✓ Outdoor use(IP 65)
- ✓ Designed for Wall and Pole mount applications
- ✓ Safety lock
- ✓ Rugged and durable construction for long term reliability (UV resistance)
- ✓ Design for small and medium volumes of fiber optic cables
- ✓ Re-usable
- ✓ ROHS compliance
- ✓ Dimensions 398 mm x 327 mm x 118 mm (L x W x H)

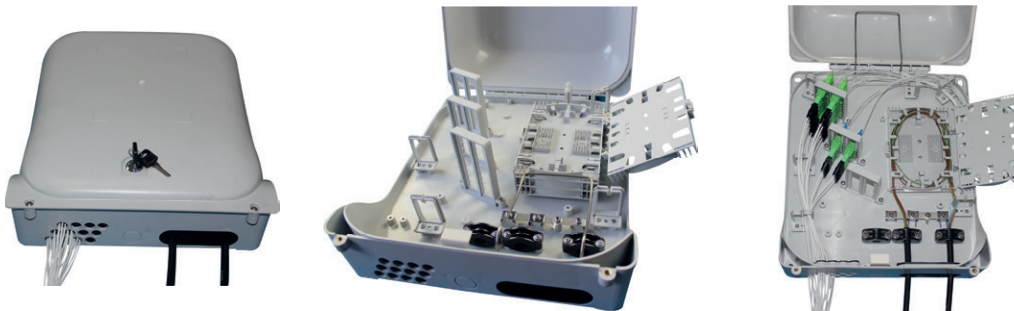

### Specifications & Ordering Information

Order No	Dimensions LxWxH(mm)	Cable Ports	Spliced Fiber Storage Capacity	PLC Splitter	Adaptor Capacity
ALF-TB-X48A	398x327x118	The oval port is for 1 loop cable or 2 cables with max 20 mm The reserved port is for cables with max 18 mm The twelve ports with diameter 14 mm each port can hold 4 drop cables, totally 48 drop cables	144 Splices (6x24 splices)	up to 6 pcs 1x8, 1x16 or 1x32 Splitter	IP54

